DATE	BY
3-13-12	REH

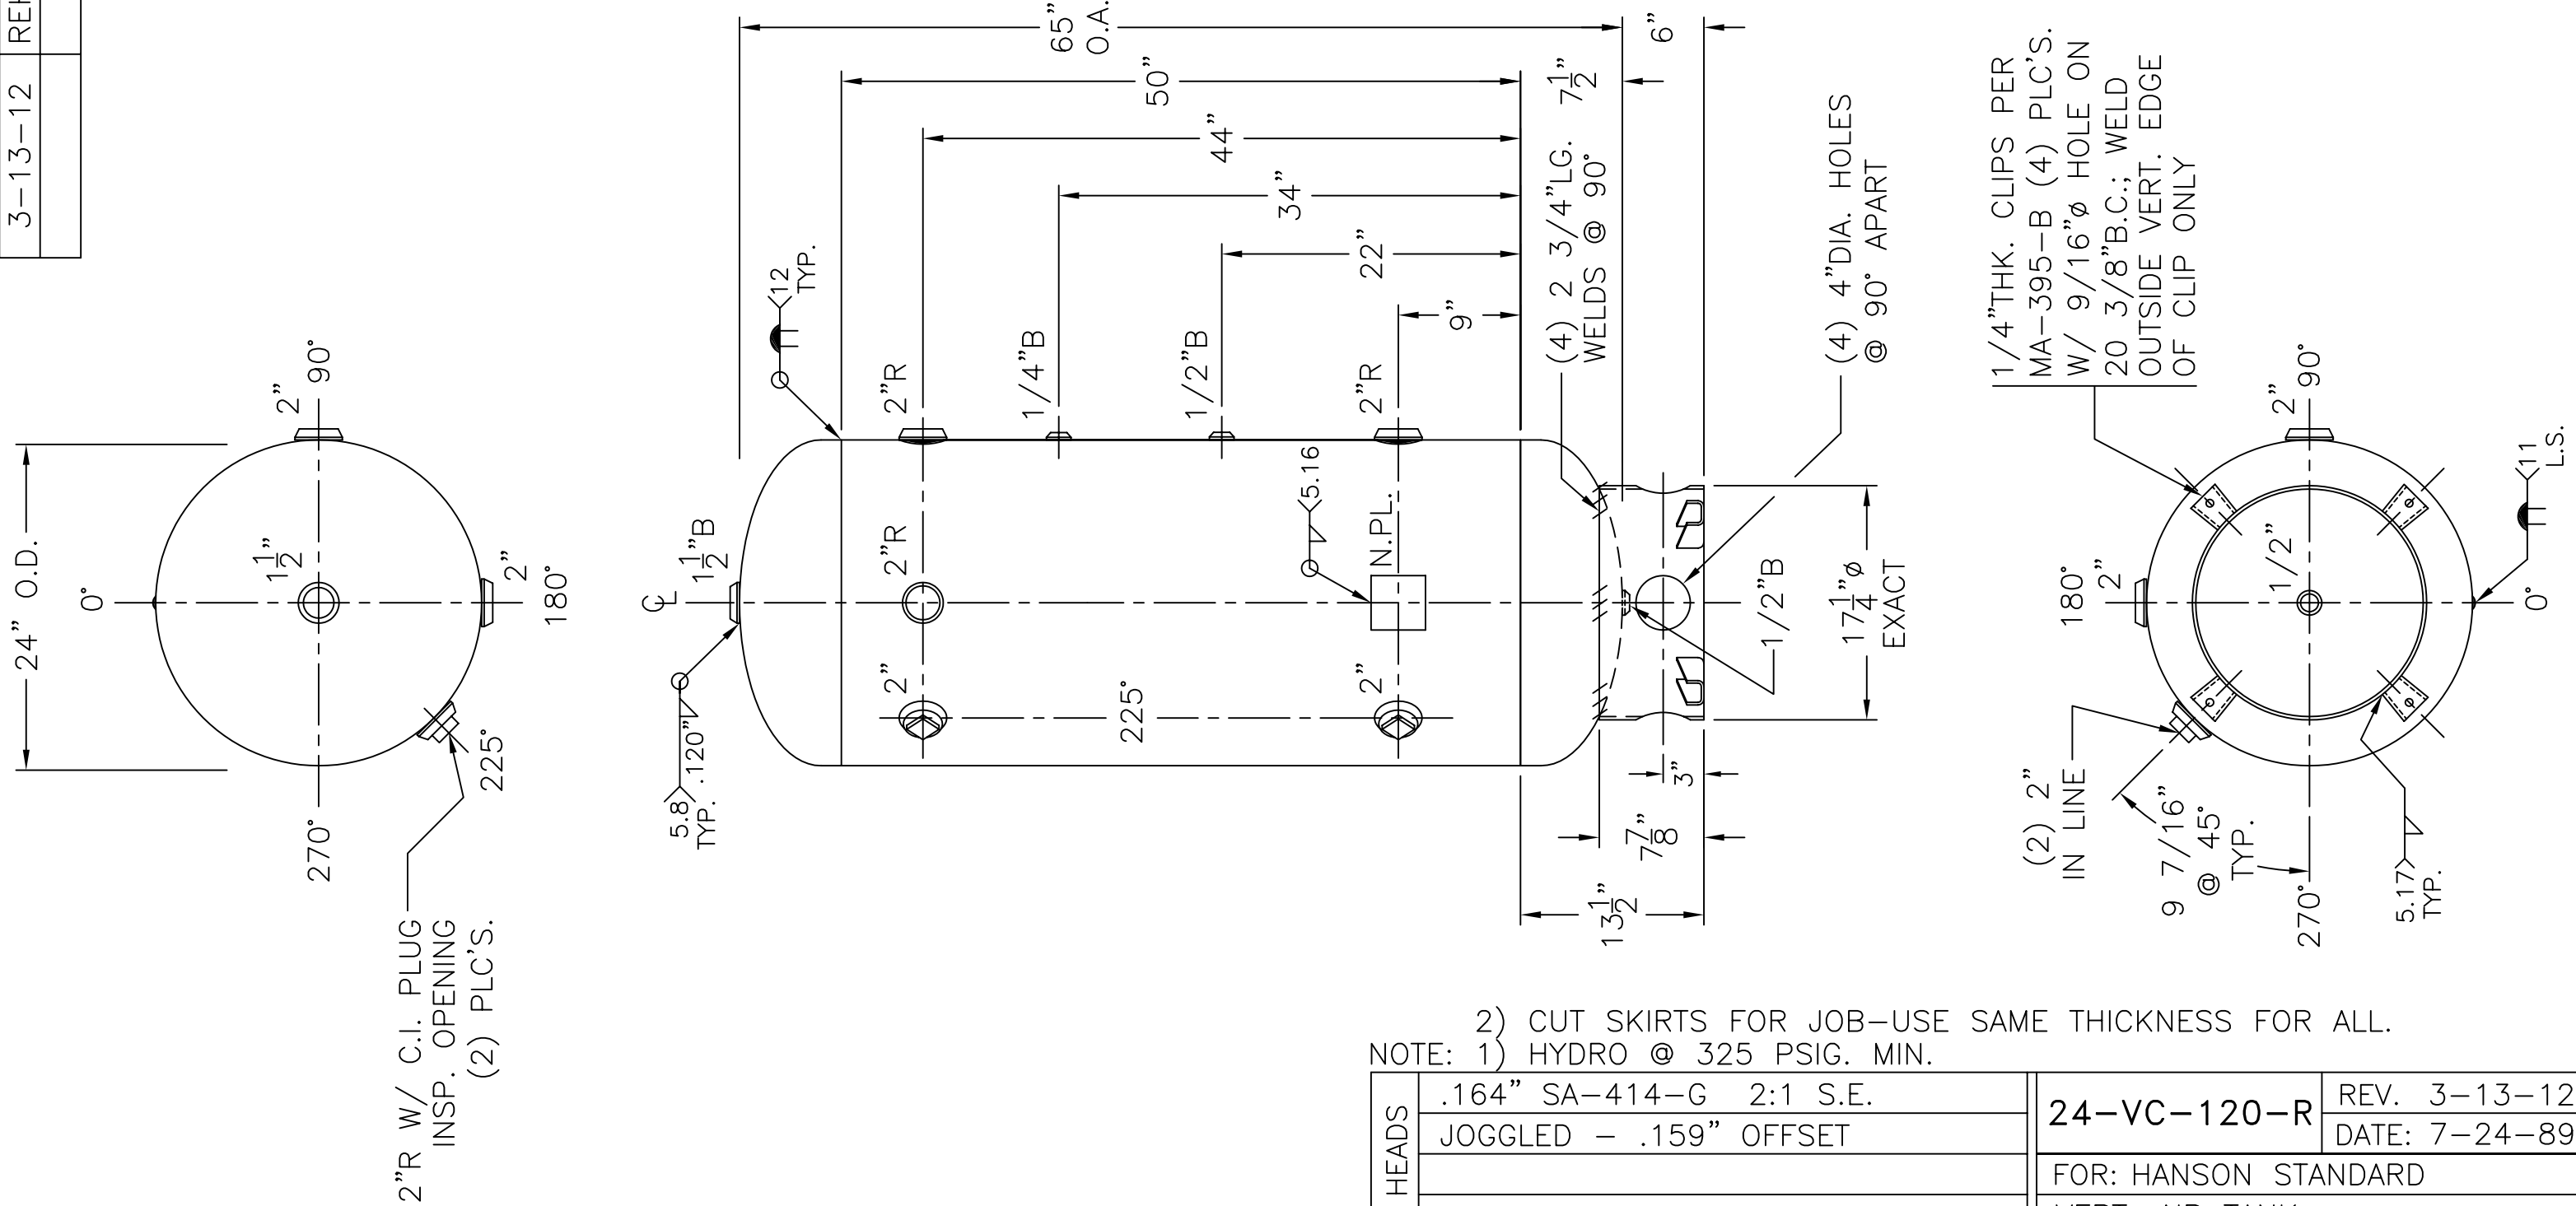

NOTE: 1) HYDRO @ 325 PSIG. MIN.
2) CUT SKIRTS FOR JOB-USE SAME THICKNESS FOR ALL.

SHELL / HEADS	.164" SA-414-G 2:1 S.E.	24-VC-120-R
	JOGGLED - .159" OFFSET	REV. 3-13-12
		DATE: 7-24-89
		FOR: HANSON STANDARD
		VERT. AIR TANK
	.165" SA-414-G	
		INSIDE: UNPAINTED
M.A.W.P. 250 PSIG. @ 400 °F		
M.D.M.T. -20 °F @ 250 PSIG.		OUTSIDE: PRIME
ASME. SECTION VIII DIV. 1, 2010 ADD 2011		CAD "B" SIZE UNDER STD. SERIES
X-RAY: RT-4 SPOT L.S. ONLY		BY: E.S. SCALE: 1"=12"
GALLONS: 120	WT. 302 LBS.	ROY E. HANSON JR. MFG.
SERIAL NO.		1600 E. WASHINGTON BLVD.
N.B.		LOS ANGELES, CA 90021