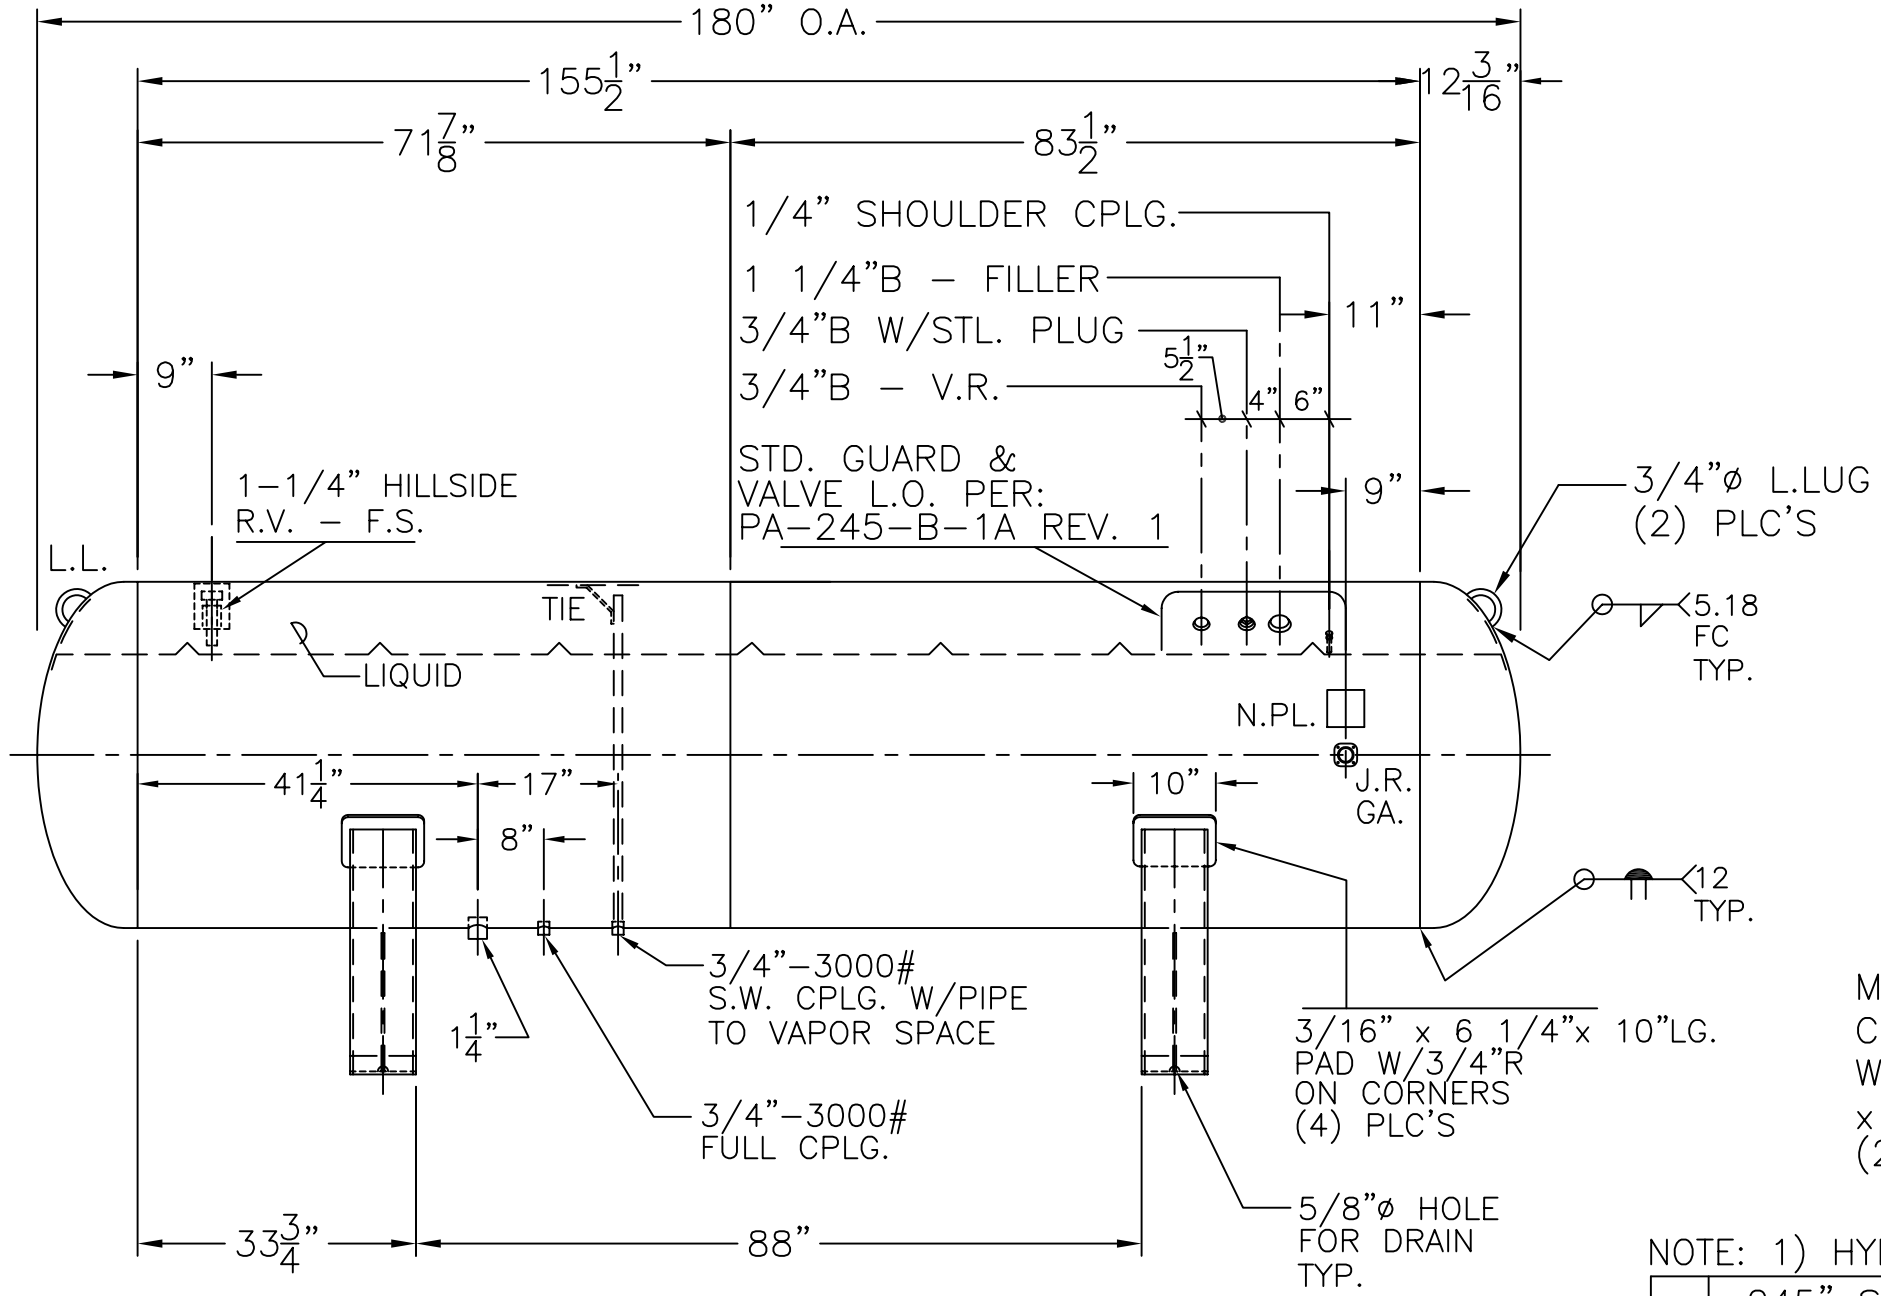

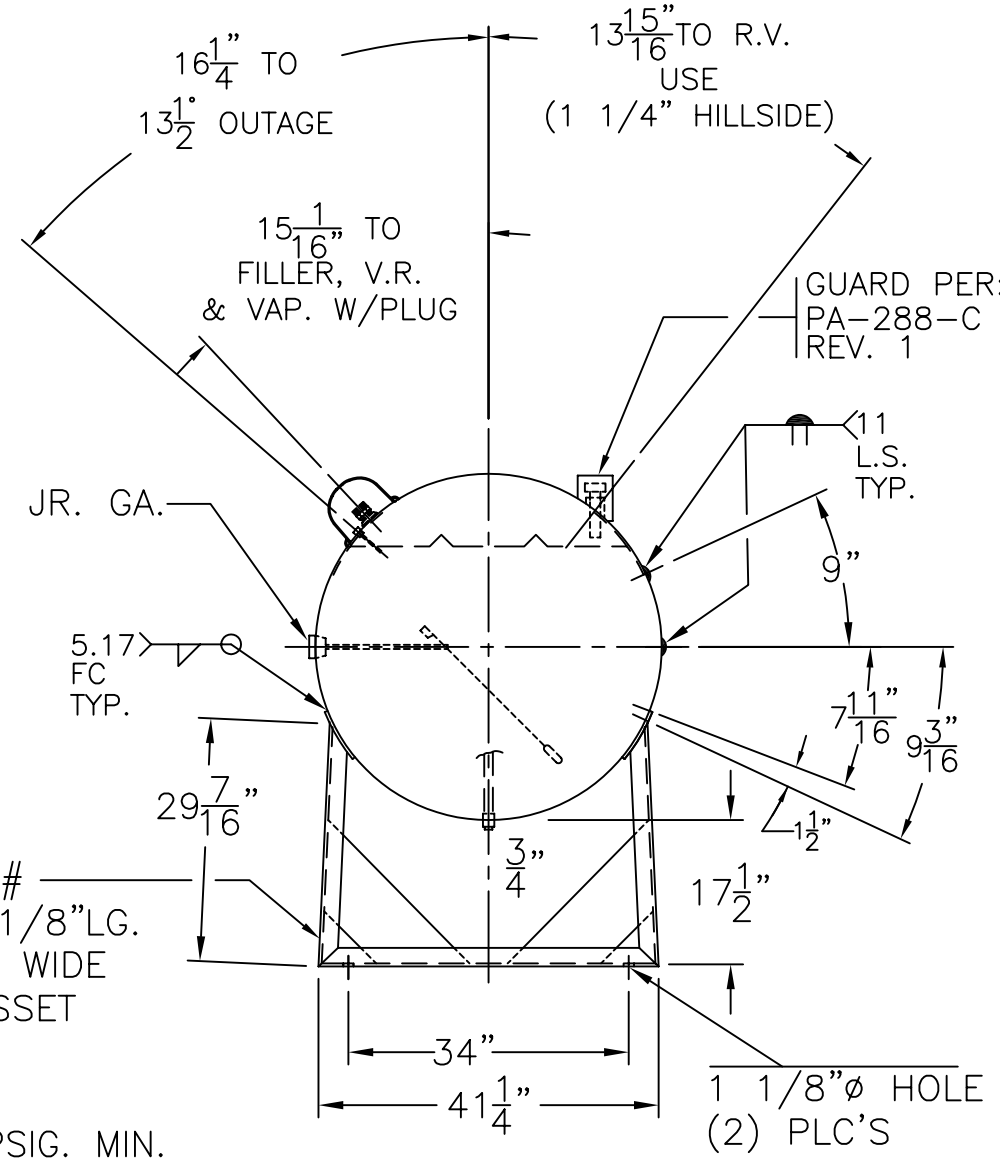

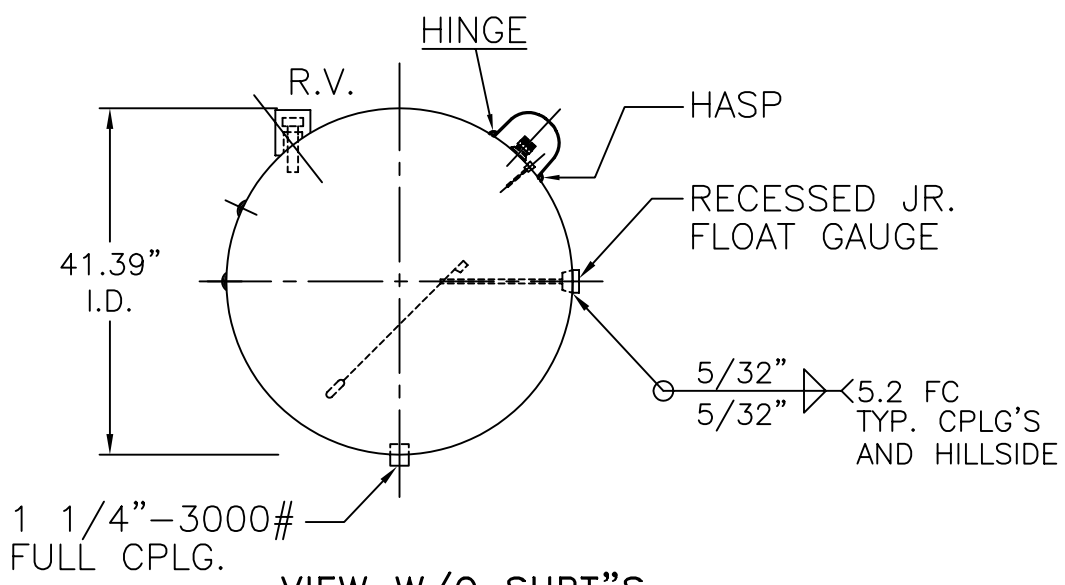

VIEW W/O SUPT"S

NOTE: 1) HYDRO @ 325 PSIG. MIN.

SHELL / HEADS	.245" SA–455 2:1 S.E.	PA–515–B	REV. 7–27–11
	JOGGLE – .289" OFFSET		DATE: 1–2–90
		FOR: HANSON STANDARD	
		HORIZ. PROPANE TANK DISPENSER	
	.289" SA–455	CFM REQ. = 3654	
		SURFACE AREA = 172.1 SQ. FT.	
M.A.W.P. 250 PSIG. @ 200 °F		INSIDE: UNPAINTED & DEHYDRATE	
M.D.M.T. –20 °F @ 250 PSIG.			
ASME. SECTION VIII DIV. 1, 2010 ADD. 2010		OUTSIDE: PRIME & WHITE	
X–RAY: RT–4 SPOT L.S. & HDS. G.S.			
GALLONS: 1000	WT. 2329 LBS.	BY: J.G.	SCALE: 1/2"=12"
SERIAL NO.		ROY E. HANSON JR. MFG.	
N.B.		1600 E. WASHINGTON BLVD. LOS ANGELES, CA 90021	